


TYPE 12 PAINTED J.I.C. HINGE COVER WIRING TROUGH

CONSTRUCTION:

C & I ENCLOSURES TYPE 12 PAINTED J.I.C. HINGE COVER WIRING TROUGH IS FABRICATED IN ACCORDANCE WITH U.L. SPECIFICATIONS FROM CODE GAUGE MATERIAL. AN OIL RESISTANT GASKET IS ATTACHED TO THE COVER TO PREVENT MOISTURE OR DUST FROM ENTERING THE TROUGH. THE COVER IS ATTACHED TO THE BODY WITH BUTT HINGES ON ONE SIDE AND EXTERNAL SCREW CLAMPS ON THE OTHER. ALL SEAMS ARE CONTINUOUSLY WELDED AND GROUND SMOOTH. EXTERNAL MOUNTING FEET ARE PROVIDED.

FINISH:

C & I ENCLOSURES TYPE 12 PAINTED J.I.C. HINGE COVER WIRING TROUGH IS PROVIDED WITH AN ANSI 61 GRAY POLYESTER POWDERCOATING INSIDE AND OUT OVER PAINT GRIP GALVANIZED STEEL.

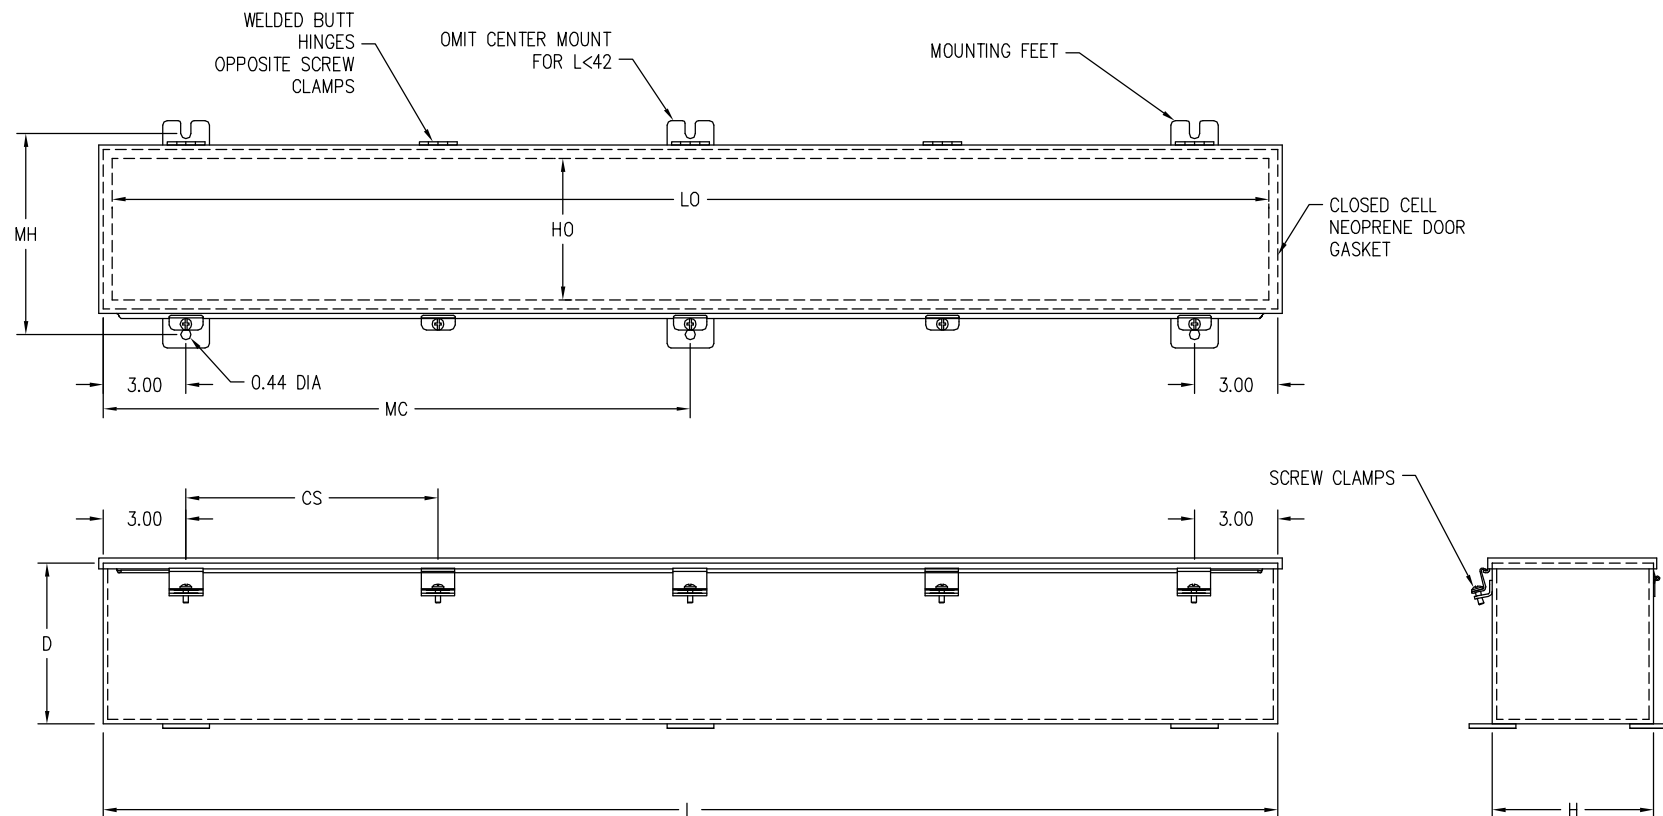

CUSTOMER APPROVAL

BY _____
DATE _____

DRAWING NOT TO SCALE
SOME FEATURES
EXAGGERATED FOR CLARITY



913 Industrial Park Cir.
Bessemer, AL 35022
PHONE: 205.424.4855
FAX: 205.424.4858
www.cienlosures.com



TYPE 12 PAINTED HINGE COVER WIRING TROUGH

Part No	Trough Dimensions					Mat'l Gauge	Mounting		Screw Clamps	
	Nominal			Opening					Spacing	Clamp Count
	H	D	L	LO	HO		MH	MC	CS	CC
I-1-44JT	4.00	4.00	12.00	11.24	3.24	16	5.32	-----	-----	2
I-2-44JT	4.00	4.00	24.00	23.24	3.24	16	5.32	-----	-----	2
I-3-44JT	4.00	4.00	36.00	35.24	3.24	16	5.32	-----	15.00	3
I-4-44JT	4.00	4.00	48.00	47.24	3.24	16	5.32	24.00	21.00	3
I-1-66JT	6.00	6.00	12.00	11.24	5.24	16	7.32	-----	-----	2
I-2-66JT	6.00	6.00	24.00	23.24	5.24	16	7.32	-----	-----	2
I-3-66JT	6.00	6.00	36.00	35.24	5.24	16	7.32	-----	15.00	3
I-4-66JT	6.00	6.00	48.00	47.24	5.24	16	7.32	24.00	21.00	3
I-5-66JT	6.00	6.00	60.00	59.24	5.24	16	7.32	30.00	18.00	4
I-6-66JT	6.00	6.00	72.00	71.24	5.24	16	7.32	36.00	22.00	4
I-2-88JT	8.00	8.00	24.00	23.24	7.24	14	9.32	-----	-----	2
I-3-88JT	8.00	8.00	36.00	35.24	7.24	14	9.32	-----	15.00	3
I-4-88JT	8.00	8.00	48.00	47.24	7.24	14	9.32	24.00	21.00	3
I-5-88JT	8.00	8.00	60.00	59.24	7.24	14	9.32	30.00	18.00	4
I-6-88JT	8.00	8.00	72.00	71.24	7.24	14	9.32	36.00	22.00	4
I-2-1010JT	10.00	10.00	24.00	23.24	9.24	14	11.32	-----	-----	2
I-3-1010JT	10.00	10.00	36.00	35.24	9.24	14	11.32	-----	15.00	3
I-4-1010JT	10.00	10.00	48.00	47.24	9.24	14	11.32	24.00	21.00	3
I-5-1010JT	10.00	10.00	60.00	59.24	9.24	14	11.32	30.00	18.00	4
I-6-1010JT	10.00	10.00	72.00	71.24	9.24	14	11.32	36.00	22.00	4
I-8-1010JT	10.00	10.00	96.00	95.24	9.24	14	11.32	48.00	22.50	5
I-2-1212JT	12.00	12.00	24.00	23.24	11.24	14	13.32	-----	-----	2
I-3-1212JT	12.00	12.00	36.00	35.24	11.24	14	13.32	-----	15.00	3
I-4-1212JT	12.00	12.00	48.00	47.24	11.24	14	13.32	24.00	21.00	3
I-5-1212JT	12.00	12.00	60.00	59.24	11.24	14	13.32	30.00	18.00	4
I-6-1212JT	12.00	12.00	72.00	71.24	11.24	14	13.32	36.00	22.00	4
I-8-1212JT	12.00	12.00	96.00	95.24	11.24	14	13.32	48.00	22.50	5