

TYPE 12 PAINTED SLIM-LINE PUSHBUTTON ENCLOSURES


CONSTRUCTION:

C & I ENCLOSURES TYPE 12 SLIM-LINE PUSHBUTTON ENCLOSURES ARE FABRICATED IN ACCORDANCE WITH U.L. SPECIFICATIONS FROM CODE GAUGE MATERIAL. ALL SEAMS ARE CONTINUOUSLY WELDED AND GROUND SMOOTH. AN OIL RESISTANT GASKET IS ATTACHED TO THE COVER TO PREVENT MOISTURE OR DUST FROM ENTERING THE BOX.

FINISH:

C & I ENCLOSURES TYPE 12 SLIM-LINE PUSHBUTTON ENCLOSURES ARE PROVIDED WITH AN ANSI 61 GRAY POLYESTER POWDERCOATING INSIDE AND OUT OVER PAINT GRIP GALVANIZED STEEL.

ALL PUSHBUTTON HOLES
SPACED AT 2.25 AND CENTERED
IN COVER

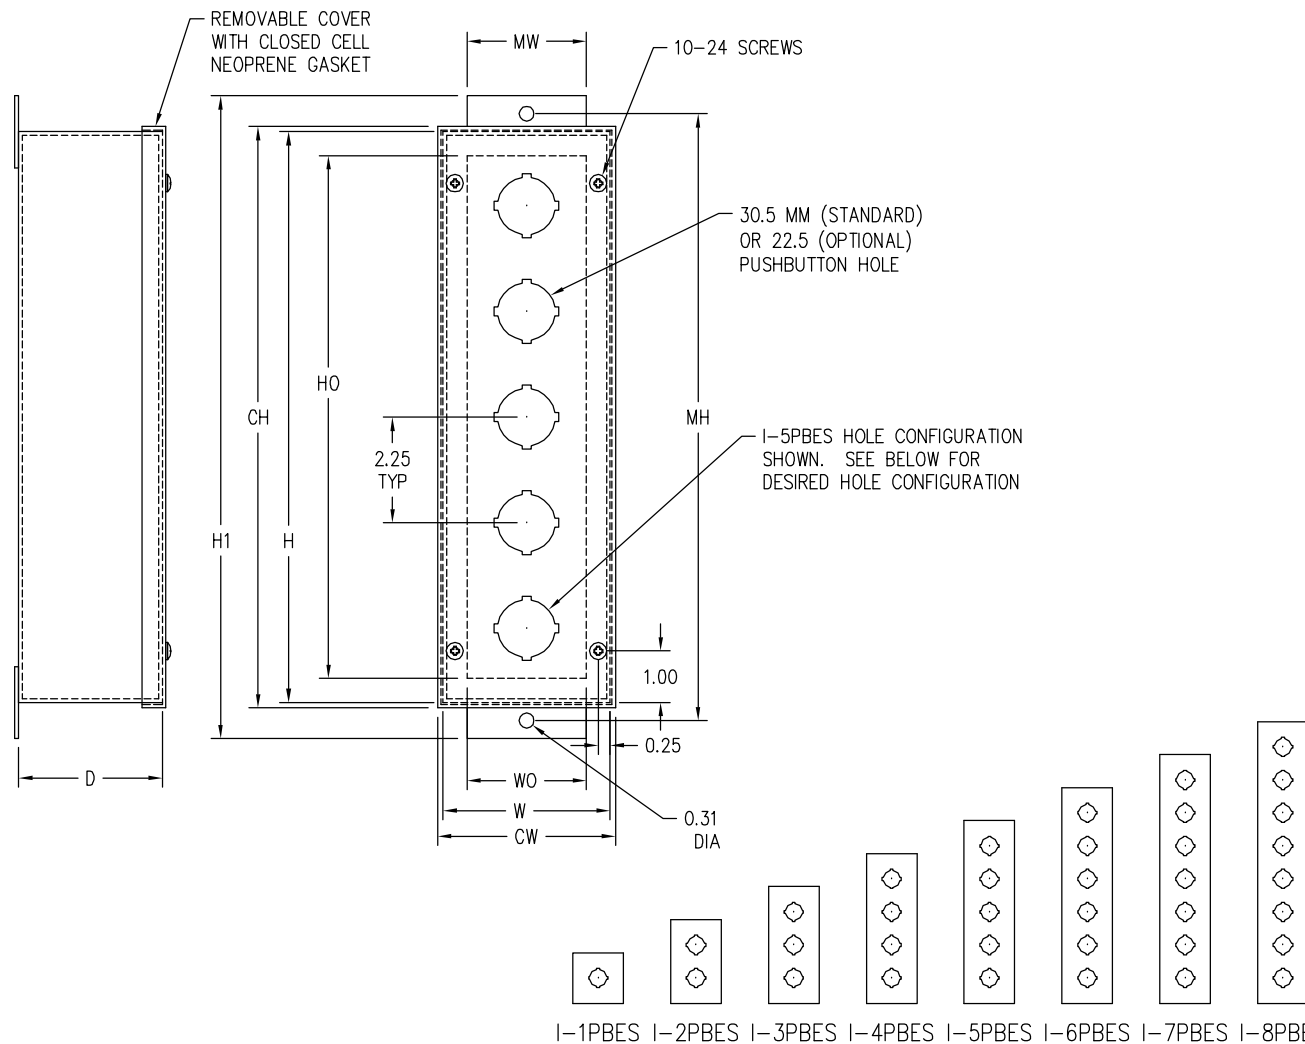

CUSTOMER APPROVAL
BY _____
DATE _____

DRAWING NOT TO SCALE
SOME FEATURES
EXAGGERATED FOR CLARITY



913 Industrial Park Cir.
Bessemer, AL 35022
PHONE: 205.424.4855
FAX: 205.424.4858
www.cienlosures.com



TYPE 12 PAINTED SLIM LINE PUSHBUTTON ENCLOSURES

Part No	Enclosure Dimensions						Mat'l Gauge	Mounting		Cover	
	Nominal			Other Dimensions	Opening			MH	MW	CH	CW
	H	W	D	H1	HO	WO					
I-1PBES	3.88	2.50	2.38	5.38	2.88	1.50	16	4.63	1.50	4.10	2.72
I-2PBES	6.13	2.50	2.38	7.63	5.13	1.50	16	6.88	1.50	6.35	2.72
I-3PBES	8.38	2.50	2.38	9.88	7.38	1.50	16	9.13	1.50	8.60	2.72
I-4PBES	10.63	2.50	2.38	12.13	9.63	1.50	16	11.38	1.50	10.85	2.72
I-5PBES	12.88	2.50	2.38	14.38	11.88	1.50	16	13.63	1.50	13.10	2.72
I-6PBES	15.13	2.50	2.38	16.63	14.13	1.50	16	15.88	1.50	15.35	2.72
I-7PBES	18.38	2.50	2.38	19.88	17.38	1.50	16	19.13	1.50	18.60	2.72
I-8PBES	20.63	2.50	2.38	22.13	19.63	1.50	16	21.38	1.50	20.85	2.72