

# TYPE 12 PAINTED STANDARD PUSHBUTTON ENCLOSURES



## CONSTRUCTION:

ENCLOSURES ARE FABRICATED IN ACCORDANCE WITH U.L. SPECIFICATIONS FROM CODE GAUGE MATERIAL. ALL SEAMS ARE CONTINUOUSLY WELDED AND GROUND SMOOTH. AN OIL RESISTANT GASKET IS ATTACHED TO THE FULLY REMOVABLE COVER TO PREVENT MOISTURE OR DUST FROM ENTERING THE BOX.

## FINISH:

ANSI 61 GRAY POLYESTER POWDER COATING INSIDE AND OUT OVER PAINT GRIP GALVANIZED STEEL.

ALL PUSHBUTTON HOLES  
SPACED AT 2.25 AND CENTERED  
IN COVER

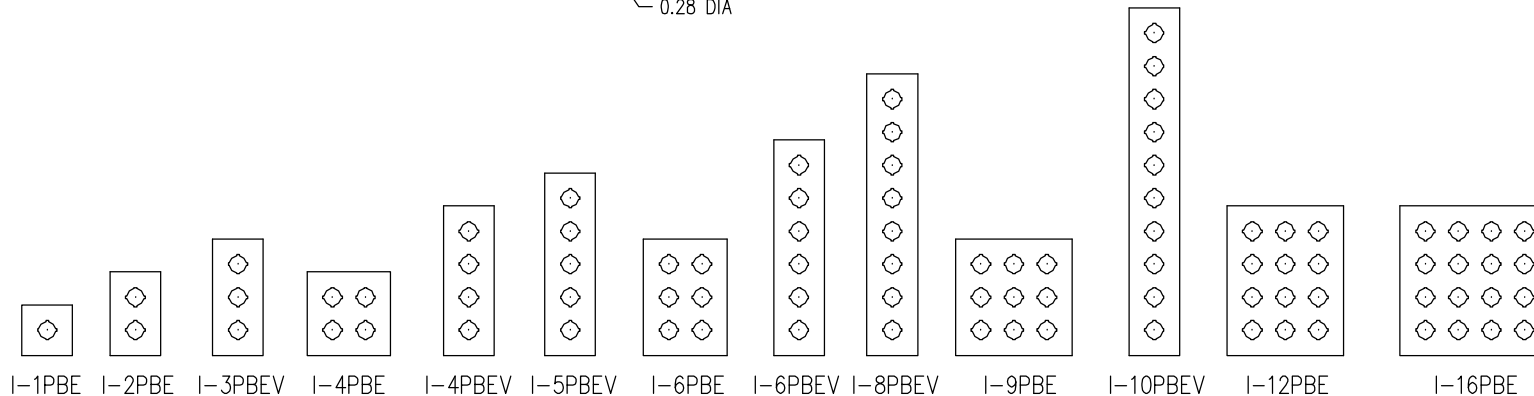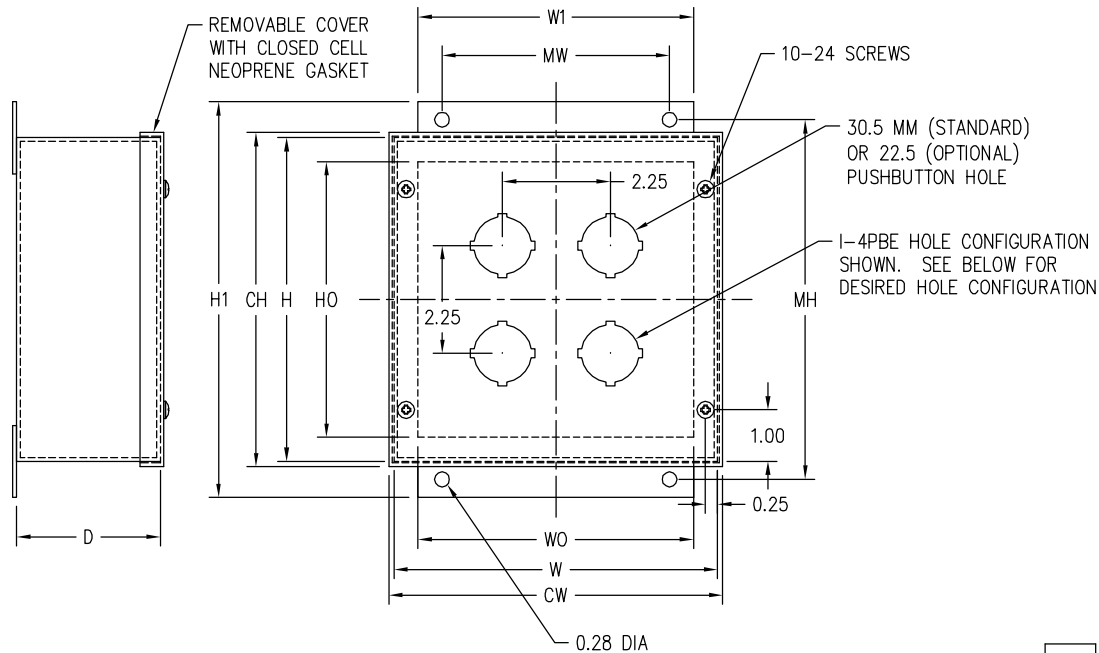

CUSTOMER APPROVAL

BY \_\_\_\_\_  
DATE \_\_\_\_\_

DRAWING NOT TO SCALE  
SOME FEATURES  
EXAGGERATED FOR CLARITY



913 Industrial Park Cir.  
Bessemer, AL 35022  
PHONE: 205.424.4855  
FAX: 205.424.4858  
www.cienlosures.com



## TYPE 12 PAINTED STANDARD PUSHBUTTON ENCLOSURES

| Part No  | Enclosure Dimensions |       |      |                  |       |         |       | Mat'l Gauge | Mounting |      | Cover |       |
|----------|----------------------|-------|------|------------------|-------|---------|-------|-------------|----------|------|-------|-------|
|          | Nominal              |       |      | Other Dimensions |       | Opening |       |             |          |      |       |       |
|          | H                    | W     | D    | H1               | W1    | HO      | WO    |             | MH       | MW   | CH    | CW    |
| I-1PBE   | 3.50                 | 3.50  | 3.00 | 5.00             | 2.50  | 2.50    | 2.50  | 16          | 4.25     | 1.50 | 3.72  | 3.72  |
| I-2PBE   | 6.75                 | 3.50  | 3.00 | 8.25             | 2.50  | 5.75    | 2.50  | 16          | 7.50     | 1.50 | 6.97  | 3.72  |
| I-4PBE   | 6.75                 | 6.75  | 3.00 | 8.25             | 5.75  | 5.75    | 5.75  | 14          | 7.50     | 4.75 | 7.00  | 7.00  |
| I-3PBE   | 9.00                 | 3.50  | 3.00 | 10.50            | 2.50  | 8.00    | 2.50  | 16          | 9.75     | 1.50 | 9.22  | 3.72  |
| I-6PBE   | 9.00                 | 6.75  | 3.00 | 10.50            | 5.75  | 8.00    | 5.75  | 14          | 9.75     | 4.75 | 9.25  | 7.00  |
| I-9PBE   | 9.00                 | 9.00  | 3.00 | 10.50            | 8.00  | 8.00    | 8.00  | 14          | 9.75     | 7.00 | 9.25  | 9.25  |
| I-4PBEV  | 11.25                | 3.50  | 3.00 | 12.75            | 2.50  | 10.25   | 2.50  | 16          | 12.00    | 1.50 | 11.47 | 3.72  |
| I-12PBE  | 11.25                | 9.00  | 3.00 | 12.75            | 8.00  | 10.25   | 8.00  | 14          | 12.00    | 7.00 | 11.50 | 9.25  |
| I-16PBE  | 11.25                | 11.25 | 3.00 | 12.75            | 10.25 | 10.25   | 10.25 | 14          | 12.00    | 9.25 | 11.50 | 11.50 |
| I-5PBE   | 13.50                | 3.50  | 3.00 | 15.00            | 2.50  | 12.50   | 2.50  | 16          | 14.25    | 1.50 | 13.72 | 3.72  |
| I-6PBEV  | 15.75                | 3.50  | 3.00 | 17.25            | 2.50  | 14.75   | 2.50  | 16          | 16.50    | 1.50 | 15.97 | 3.72  |
| I-8PBEV  | 21.25                | 3.50  | 3.00 | 22.75            | 2.50  | 20.25   | 2.50  | 16          | 22.00    | 1.50 | 21.47 | 3.72  |
| I-10PBEV | 25.75                | 3.50  | 3.00 | 27.25            | 2.50  | 24.75   | 2.50  | 16          | 26.50    | 1.50 | 25.97 | 3.72  |