


TYPE 3R RAINPROOF TROUGH

CONSTRUCTION:


C & I ENCLOSURES TYPE 3R RAINPROOF TROUGH IS FABRICATED IN ACCORDANCE WITH U.L SPECIFICATIONS FROM CODE GAUGE MATERIAL. A DRIPSHIELD ALONG THE TOP PROTECTS FROM FALLING RAIN, SNOW OR SLEET. A SLIDE ON COVER IS ATTACHED BY SCREWS ALONG THE BOTTOM EDGE OF THE TROUGH.

FINISH:

C & I ENCLOSURES TYPE 3R RAINPROOF TROUGH IS AVAILABLE IN G-90U GALVANIZED STEEL, OR AN ANSI 61 GRAY POLYESTER POWDERCOATING INSIDE AND OUT OVER PAINT GRIP GALVANIZED STEEL.

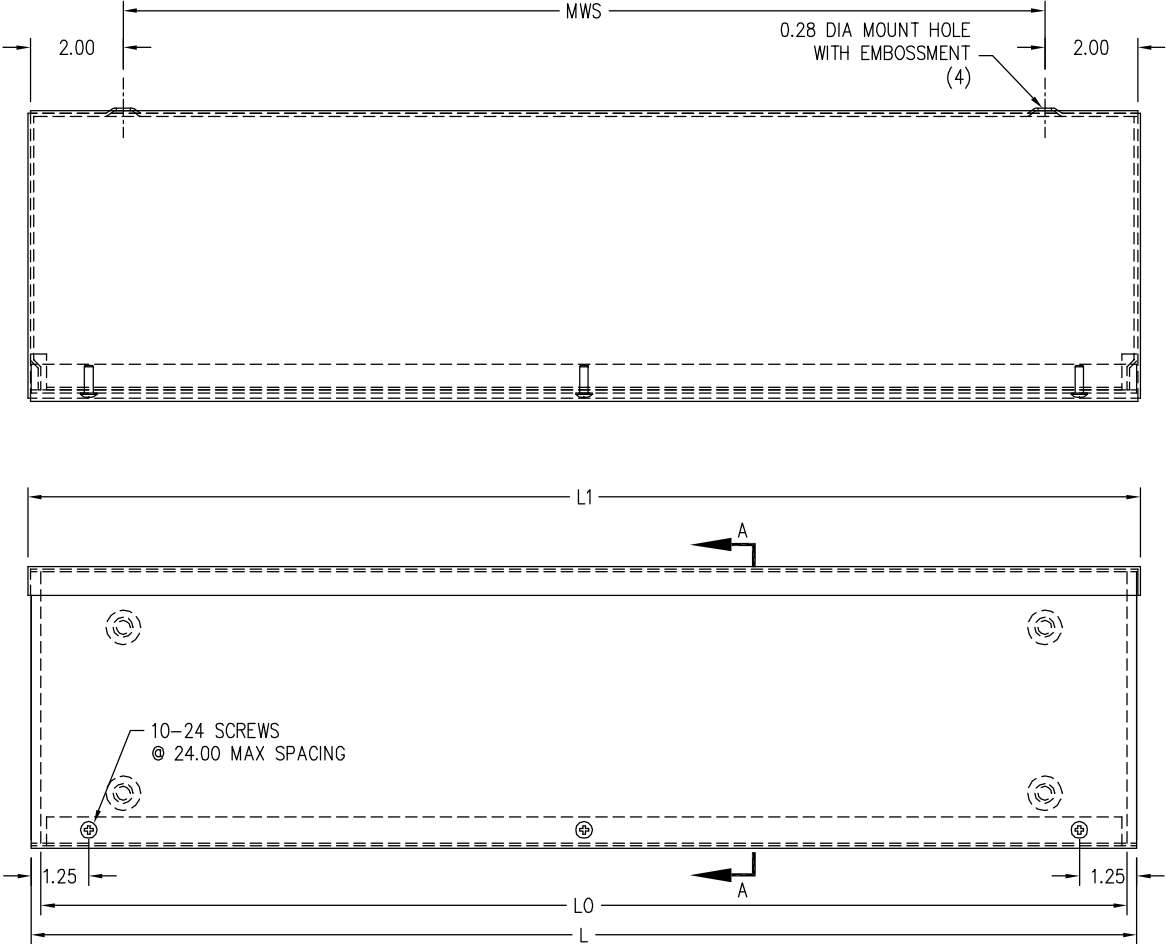

CUSTOMER APPROVAL	
BY _____	
DATE _____	

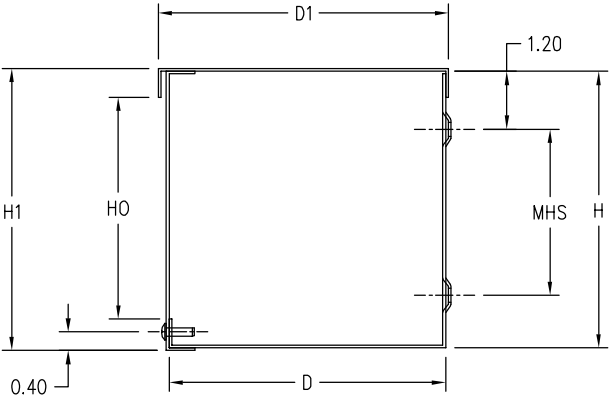

DRAWING NOT TO SCALE
SOME FEATURES
EXAGGERATED FOR CLARITY



TYPE 3R RAINPROOF TROUGH

Part No	Trough Dimensions									Mat'l Gauge	Mounting	
				Opening		Overall			MHS		MWS	
	H	D	L	HO	LO	H1	D1	L1				
C-1-44RT	4.00	4.00	12.00	2.81	11.57	4.12	4.30	12.15	16	1.6	8	
C-2-44RT	4.00	4.00	24.00	2.81	23.57	4.12	4.30	24.15	16	1.6	20	
C-3-44RT	4.00	4.00	36.00	2.81	35.57	4.12	4.30	36.15	16	1.6	32	
C-4-44RT	4.00	4.00	48.00	2.81	47.57	4.12	4.30	48.15	16	1.6	44	
C-5-44RT	4.00	4.00	60.00	2.81	59.57	4.12	4.30	60.15	16	1.6	56	
C-6-44RT	4.00	4.00	72.00	2.81	71.57	4.12	4.30	72.15	16	1.6	68	
C-7-44RT	4.00	4.00	84.00	2.81	83.57	4.12	4.30	84.15	16	1.6	80	
C-8-44RT	4.00	4.00	96.00	2.81	95.57	4.12	4.30	96.15	16	1.6	92	
C-10-44RT	4.00	4.00	117.75	2.81	117.32	4.12	4.30	117.90	16	1.6	113.8	
C-1-66RT	6.00	6.00	12.00	4.81	11.57	6.12	6.30	12.15	16	3.6	8	
C-2-66RT	6.00	6.00	24.00	4.81	23.57	6.12	6.30	24.15	16	3.6	20	
C-3-66RT	6.00	6.00	36.00	4.81	35.57	6.12	6.30	36.15	16	3.6	32	
C-4-66RT	6.00	6.00	48.00	4.81	47.57	6.12	6.30	48.15	16	3.6	44	
C-5-66RT	6.00	6.00	60.00	4.81	59.57	6.12	6.30	60.15	16	3.6	56	
C-6-66RT	6.00	6.00	72.00	4.81	71.57	6.12	6.30	72.15	16	3.6	68	
C-7-66RT	6.00	6.00	84.00	4.81	83.57	6.12	6.30	84.15	16	3.6	80	
C-8-66RT	6.00	6.00	96.00	4.81	95.57	6.12	6.30	96.15	16	3.6	92	
C-10-66RT	6.00	6.00	117.75	4.81	117.32	6.12	6.30	117.90	16	3.6	113.8	
C-1-88RT	8.00	8.00	12.00	6.81	11.57	8.12	8.30	12.15	16	5.6	8	
C-2-88RT	8.00	8.00	24.00	6.81	23.57	8.12	8.30	24.15	16	5.6	20	
C-3-88RT	8.00	8.00	36.00	6.81	35.57	8.12	8.30	36.15	16	5.6	32	
C-4-88RT	8.00	8.00	48.00	6.81	47.57	8.12	8.30	48.15	16	5.6	44	
C-5-88RT	8.00	8.00	60.00	6.81	59.57	8.12	8.30	60.15	16	5.6	56	
C-6-88RT	8.00	8.00	72.00	6.81	71.57	8.12	8.30	72.15	16	5.6	68	
C-7-88RT	8.00	8.00	84.00	6.81	83.57	8.12	8.30	84.15	16	5.6	80	
C-8-88RT	8.00	8.00	96.00	6.81	95.57	8.12	8.30	96.15	16	5.6	92	
C-10-88RT	8.00	8.00	117.75	6.81	117.32	8.12	8.30	117.90	16	5.6	113.8	
C-1-1010RT	10.00	10.00	12.00	8.81	11.57	10.12	10.30	12.15	16	7.6	8	
C-2-1010RT	10.00	10.00	24.00	8.81	23.57	10.12	10.30	24.15	16	7.6	20	
C-3-1010RT	10.00	10.00	36.00	8.81	35.57	10.12	10.30	36.15	16	7.6	32	
C-4-1010RT	10.00	10.00	48.00	8.81	47.57	10.12	10.30	48.15	16	7.6	44	
C-5-1010RT	10.00	10.00	60.00	8.81	59.57	10.12	10.30	60.15	16	7.6	56	
C-6-1010RT	10.00	10.00	72.00	8.81	71.57	10.12	10.30	72.15	16	7.6	68	
C-7-1010RT	10.00	10.00	84.00	8.81	83.57	10.12	10.30	84.15	16	7.6	80	
C-8-1010RT	10.00	10.00	96.00	8.81	95.57	10.12	10.30	96.15	16	7.6	92	
C-10-1010RT	10.00	10.00	117.75	8.81	117.32	10.12	10.30	117.90	16	7.6	113.8	
C-1-1212RT	12.00	12.00	12.00	10.83	11.51	12.15	12.33	12.18	14	9.6	8	
C-2-1212RT	12.00	12.00	24.00	10.83	23.51	12.15	12.33	24.18	14	9.6	20	
C-3-1212RT	12.00	12.00	36.00	10.83	35.51	12.15	12.33	36.18	14	9.6	32	
C-4-1212RT	12.00	12.00	48.00	10.83	47.51	12.15	12.33	48.18	14	9.6	44	
C-5-1212RT	12.00	12.00	60.00	10.83	59.51	12.15	12.33	60.18	14	9.6	56	
C-6-1212RT	12.00	12.00	72.00	10.83	71.51	12.15	12.33	72.18	14	9.6	68	
C-7-1212RT	12.00	12.00	84.00	10.83	83.51	12.15	12.33	84.18	14	9.6	80	
C-8-1212RT	12.00	12.00	96.00	10.83	95.51	12.15	12.33	96.18	14	9.6	92	
C-10-1212RT	12.00	12.00	117.75	10.83	117.26	12.15	12.33	117.93	14	9.6	113.8	