



TYPE 4X STAINLESS STEEL FEED-THROUGH WIREWAY

CONSTRUCTION:



C & I ENCLOSURES TYPE 4X STAINLESS STEEL FEED-THROUGH WIREWAY IS FABRICATED IN ACCORDANCE WITH U.L. SPECIFICATIONS FROM CODE GAUGE TYPE 304 STAINLESS STEEL. AN OIL RESISTANT GASKET IS ATTACHED TO THE COVER TO PREVENT DUST FROM ENTERING THE WIREWAY. THE COVER IS ATTACHED TO THE BODY WITH BUTT HINGES ON ONE SIDE AND EXTERNAL SCREW CLAMPS ON THE OTHER. ALL SEAMS ARE CONTINUOUSLY WELDED AND GROUND SMOOTH.

FINISH:

C & I ENCLOSURES TYPE 4X STAINLESS STEEL FEED-THROUGH WIREWAY IS PROVIDED UNPAINTED AND HAS A BRUSHED FINISH ON THE EXTERIOR.

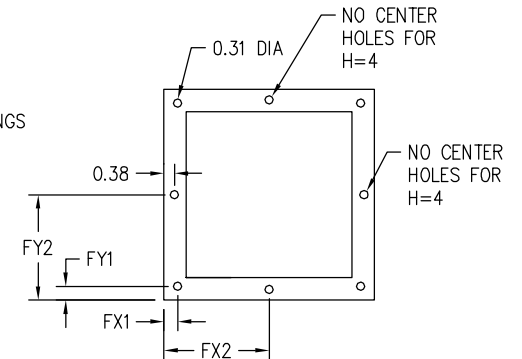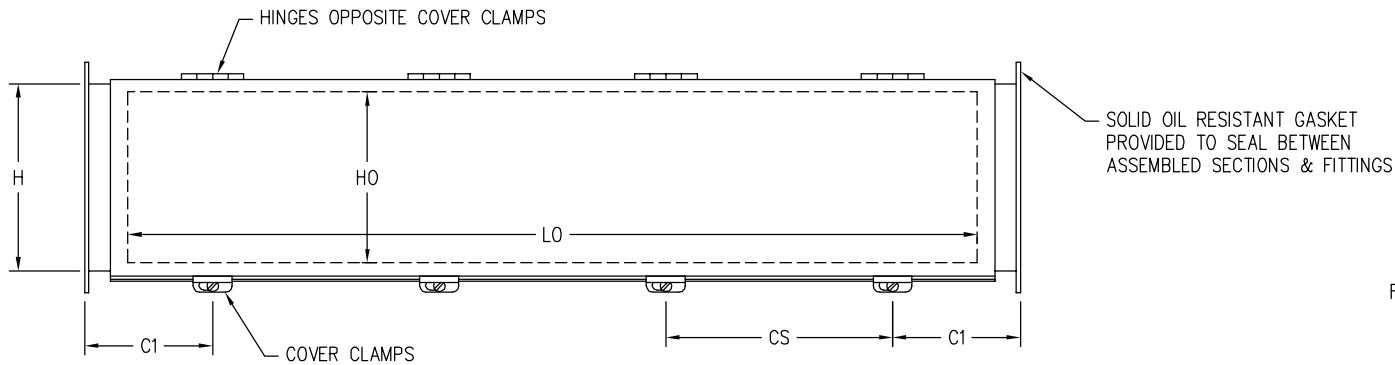

FLANGE DETAIL

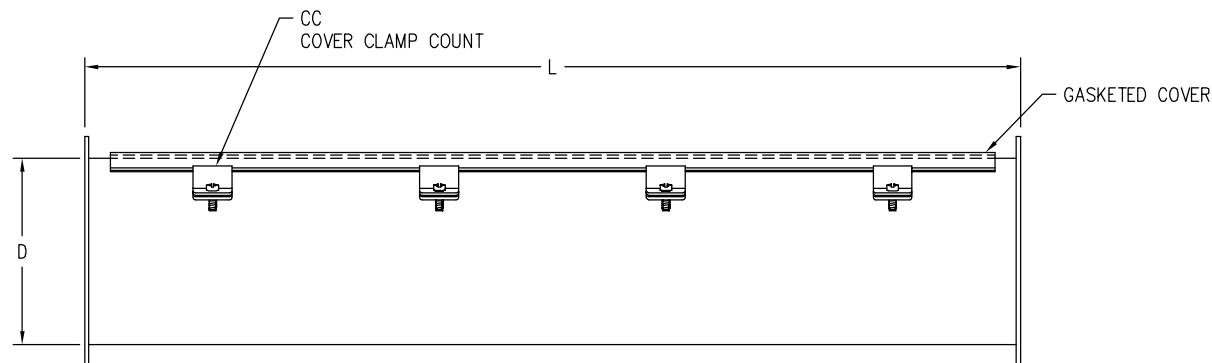

CUSTOMER APPROVAL
BY _____
DATE _____

DRAWING NOT TO SCALE
SOME FEATURES
EXAGGERATED FOR CLARITY



913 Industrial Park Cir.
Bessemer, AL 35022
PHONE: 205.424.4855
FAX: 205.424.4858
www.ciencllosures.com



TYPE 4X STAINLESS STEEL FEED THROUGH WIREWAY

Part No	Wireway Dimensions											Cover Clamps			Mat'l Gauge
				Opening		End Flange						Spacing		Count	
	H	D	L	HO	LO	H1	D1	FX1	FX2	FY1	FY2	C1	CS	CC	
I-1-44FTWT4XS	4.00	4.00	12.00	2.75	8.80	5.38	5.38	0.38	-----	0.38	-----	3.00	6.00	2	16
I-2-44FTWT4XS	4.00	4.00	24.00	2.75	20.80	5.38	5.38	0.38	-----	0.38	-----	3.00	9.00	3	16
I-3-44FTWT4XS	4.00	4.00	36.00	2.75	32.80	5.38	5.38	0.38	-----	0.38	-----	3.00	15.00	3	16
I-4-44FTWT4XS	4.00	4.00	48.00	2.75	44.80	5.38	5.38	0.38	-----	0.38	-----	3.00	14.00	4	16
I-5-44FTWT4XS	4.00	4.00	60.00	2.75	56.80	5.38	5.38	0.38	-----	0.38	-----	3.00	13.50	5	16
I-10-44FTWT4XS	4.00	4.00	120.00	2.75	116.80	5.38	5.38	0.38	-----	0.38	-----	3.00	14.25	9	16
I-1-66FTWT4XS	6.00	6.00	12.00	4.75	8.80	7.62	7.62	0.50	3.81	0.50	3.81	3.00	6.00	2	16
I-2-66FTWT4XS	6.00	6.00	24.00	4.75	20.80	7.62	7.62	0.50	3.81	0.50	3.81	3.00	9.00	3	16
I-3-66FTWT4XS	6.00	6.00	36.00	4.75	32.80	7.62	7.62	0.50	3.81	0.50	3.81	3.00	15.00	3	16
I-4-66FTWT4XS	6.00	6.00	48.00	4.75	44.80	7.62	7.62	0.50	3.81	0.50	3.81	3.00	14.00	4	16
I-5-66FTWT4XS	6.00	6.00	60.00	4.75	56.80	7.62	7.62	0.50	3.81	0.50	3.81	3.00	13.50	5	16
I-10-66FTWT4XS	6.00	6.00	120.00	4.75	116.80	7.62	7.62	0.50	3.81	0.50	3.81	3.00	14.25	9	16
I-1-88FTWT4XS	8.00	8.00	12.00	6.75	8.80	9.62	9.62	0.50	4.81	0.50	4.81	3.00	6.00	2	14
I-2-88FTWT4XS	8.00	8.00	24.00	6.75	20.80	9.62	9.62	0.50	4.81	0.50	4.81	3.00	9.00	3	14
I-3-88FTWT4XS	8.00	8.00	36.00	6.75	32.80	9.62	9.62	0.50	4.81	0.50	4.81	3.00	15.00	3	14
I-4-88FTWT4XS	8.00	8.00	48.00	6.75	44.80	9.62	9.62	0.50	4.81	0.50	4.81	3.00	14.00	4	14
I-5-88FTWT4XS	8.00	8.00	60.00	6.75	56.80	9.62	9.62	0.50	4.81	0.50	4.81	3.00	13.50	5	14
I-10-88FTWT4XS	8.00	8.00	120.00	6.75	116.80	9.62	9.62	0.50	4.81	0.50	4.81	3.00	14.25	9	14