




TYPE 4X STAINLESS STEEL SINGLE DOOR WALL MOUNT ENCLOSURES WITH PADLOCKING L HANDLE

CONSTRUCTION:

FABRICATED IN ACCORDANCE WITH U.L. SPECIFICATIONS FROM CODE GAUGE TYPE 304 STAINLESS STEEL. A ROLLED LIP IS PROVIDED AROUND THREE SIDES OF THE DOOR AND ALL SIDES OF THE ENCLOSURE OPENING TO PREVENT DIRT AND WATER FROM FALLING INTO THE ENCLOSURE WHEN THE DOOR IS OPENED. AN OIL RESISTANT GASKET IS ATTACHED TO THE COVER. DOOR HAS A WELDED CONTINUOUS HINGE AND A PADLOCKING L HANDLE WITH A 3 POINT LATCH TO INSURE A WATER-TIGHT SEAL. ALL SEAMS ARE CONTINUOUSLY WELDED AND GROUND SMOOTH. EXTERNAL MOUNTING FEET ARE PROVIDED ALONG WITH STUDS FOR MOUNTING OPTIONAL PANELS.

FINISH:

UNPAINTED WITH A BRUSHED FINISH ON THE EXTERIOR.

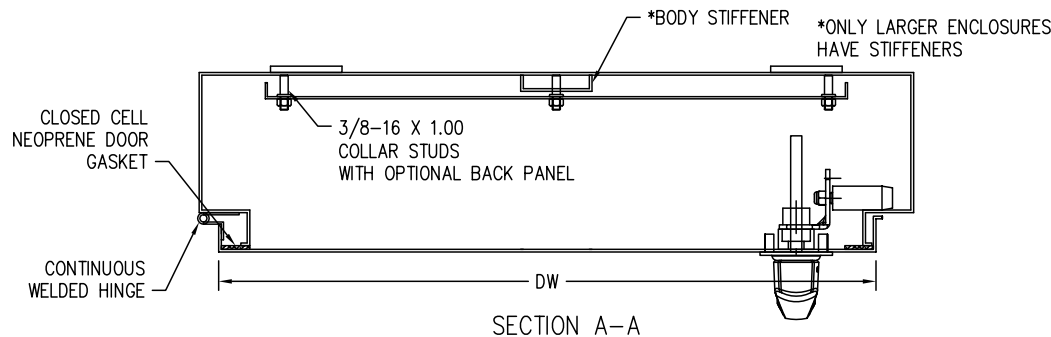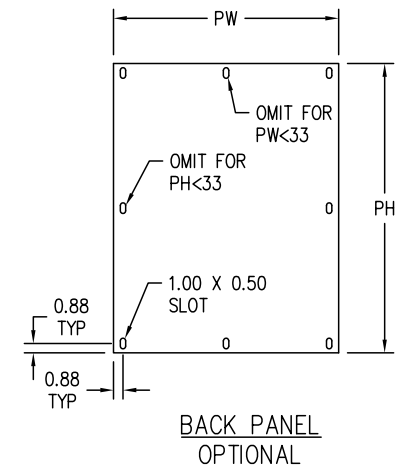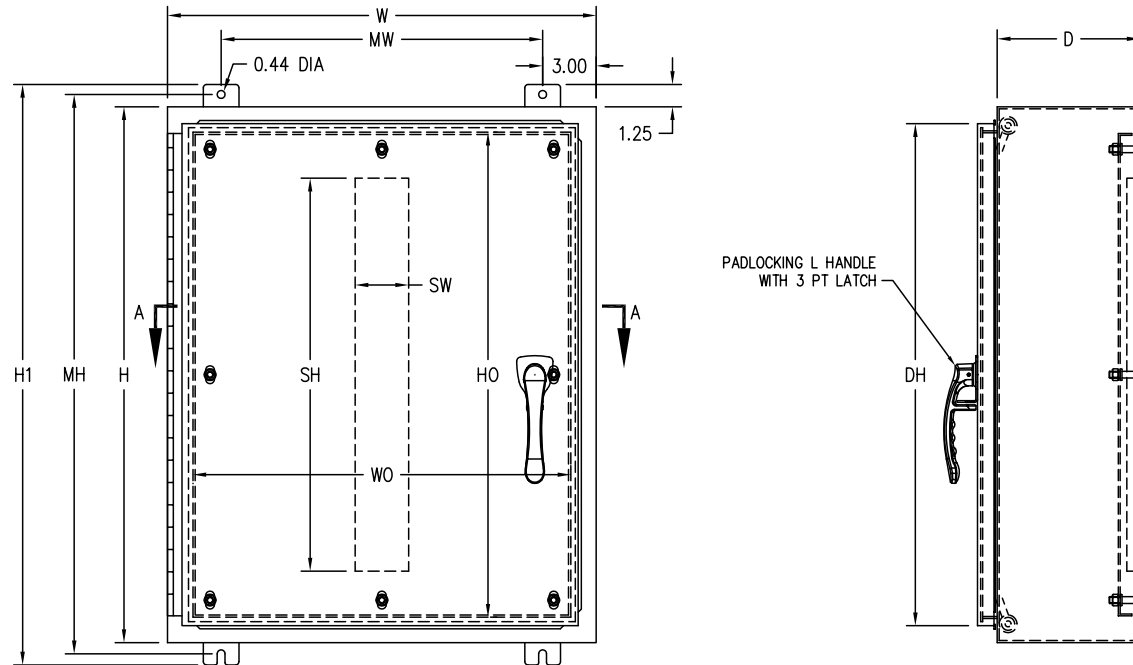

CUSTOMER APPROVAL
BY _____
DATE _____

DRAWING NOT TO SCALE
SOME FEATURES
EXAGGERATED FOR CLARITY



913 Industrial Park Cir.
Bessemer, AL 35022
PHONE: 205.424.4855
FAX: 205.424.4858
www.cienlosures.com



TYPE 4X STAINLESS STEEL SINGLE DOOR ENCLOSURES WITH PADLOCKING L HANDLE

Part No	Enclosure Dimensions						Door		Stiffener				Mat'l Gauge	Mounting		Panel	
	Nominal			Other Dims	Opening												
	H	W	D		H1	HO	WO	DH	DW	Body	Door	SH	SW	MH	MW	PH	PW
I-24126PLHST4X	24.00	12.00	6.00	26.50	21.16	9.16	24.30	12.28	N	N	----	----	14	25.32	6.00	21.00	9.00
I-24166PLHST4X	24.00	16.00	6.00	26.50	21.16	13.16	24.30	16.28	N	N	----	----	14	25.32	10.00	21.00	13.00
I-24206PLHST4X	24.00	20.00	6.00	26.50	21.16	17.16	24.30	20.28	N	N	----	----	14	25.32	14.00	21.00	17.00
I-24246PLHST4X	24.00	24.00	6.00	26.50	21.16	21.16	24.30	24.28	N	N	----	----	14	25.32	18.00	21.00	21.00
I-30206PLHST4X	30.00	20.00	6.00	32.50	27.16	17.16	30.30	20.28	N	N	----	----	14	31.32	14.00	27.00	17.00
I-30246PLHST4X	30.00	24.00	6.00	32.50	27.16	21.16	30.30	24.28	N	N	----	----	14	31.32	18.00	27.00	21.00
I-36246PLHST4X	36.00	24.00	6.00	38.50	33.16	21.16	36.30	24.28	N	N	----	----	14	37.32	18.00	33.00	21.00
I-24208PLHST4X	24.00	20.00	8.00	26.50	21.16	17.16	24.30	20.28	N	N	----	----	14	25.32	14.00	21.00	17.00
I-24248PLHST4X	24.00	24.00	8.00	26.50	21.16	21.16	24.30	24.28	N	N	----	----	14	25.32	18.00	21.00	21.00
I-30208PLHST4X	30.00	20.00	8.00	32.50	27.16	17.16	30.30	20.28	N	N	----	----	14	31.32	14.00	27.00	17.00
I-30248PLHST4X	30.00	24.00	8.00	32.50	27.16	21.16	30.30	24.28	N	N	----	----	14	31.32	18.00	27.00	21.00
I-30308PLHST4X	30.00	30.00	8.00	32.50	27.16	27.16	30.30	30.28	Y	N	22.00	3.00	14	31.32	24.00	27.00	27.00
I-36248PLHST4X	36.00	24.00	8.00	38.50	33.16	21.16	36.30	24.28	N	N	----	----	14	37.32	18.00	33.00	21.00
I-36308PLHST4X	36.00	30.00	8.00	38.50	33.16	27.16	36.30	30.28	Y	N	28.00	3.00	14	37.32	24.00	33.00	27.00
I-48368PLHST4X	48.00	36.00	8.00	50.50	45.16	33.16	48.30	36.28	Y	N	40.00	3.00	14	49.32	30.00	45.00	33.00
I-60368PLHST4X	60.00	36.00	8.00	62.50	57.16	33.16	60.30	36.28	Y	N	52.00	3.00	14	61.32	30.00	57.00	33.00
I-242010PLHST4X	24.00	20.00	10.00	26.50	21.16	17.16	24.30	20.28	N	N	----	----	14	25.32	14.00	21.00	17.00
I-302410PLHST4X	30.00	24.00	10.00	32.50	27.16	21.16	30.30	24.28	N	N	----	----	14	31.32	18.00	27.00	21.00
I-363010PLHST4X	36.00	30.00	10.00	38.50	33.16	27.16	36.30	30.28	Y	N	28.00	3.00	14	37.32	24.00	33.00	27.00
I-483010PLHST4X	48.00	30.00	10.00	50.50	45.16	27.16	48.30	30.28	Y	N	40.00	3.00	14	49.32	24.00	45.00	27.00
I-483610PLHST4X	48.00	36.00	10.00	50.50	45.16	33.16	48.30	36.28	Y	N	40.00	3.00	14	49.32	30.00	45.00	33.00
I-603610PLHST4X	60.00	36.00	10.00	62.50	57.16	33.16	60.30	36.28	Y	N	52.00	3.00	14	61.32	30.00	57.00	33.00
I-302412PLHST4X	30.00	24.00	12.00	32.50	27.16	21.16	30.30	24.28	N	N	----	----	14	31.32	18.00	27.00	21.00
I-363012PLHST4X	36.00	30.00	12.00	38.50	33.16	27.16	36.30	30.28	Y	N	28.00	3.00	14	37.32	24.00	33.00	27.00
I-483612PLHST4X	48.00	36.00	12.00	50.50	45.16	33.16	48.30	36.28	Y	N	40.00	3.00	14	49.32	30.00	45.00	33.00
I-363016PLHST4X	36.00	30.00	16.00	38.50	33.16	27.16	36.30	30.28	Y	N	28.00	3.00	14	37.32	24.00	33.00	27.00
I-483616PLHST4X	48.00	36.00	16.00	50.50	45.16	33.16	48.30	36.28	Y	N	40.00	3.00	14	49.32	30.00	45.00	33.00
I-603616PLHST4X	60.00	36.00	16.00	62.50	57.16	33.16	60.30	36.28	Y	N	52.00	3.00	14	61.32	30.00	57.00	33.00