
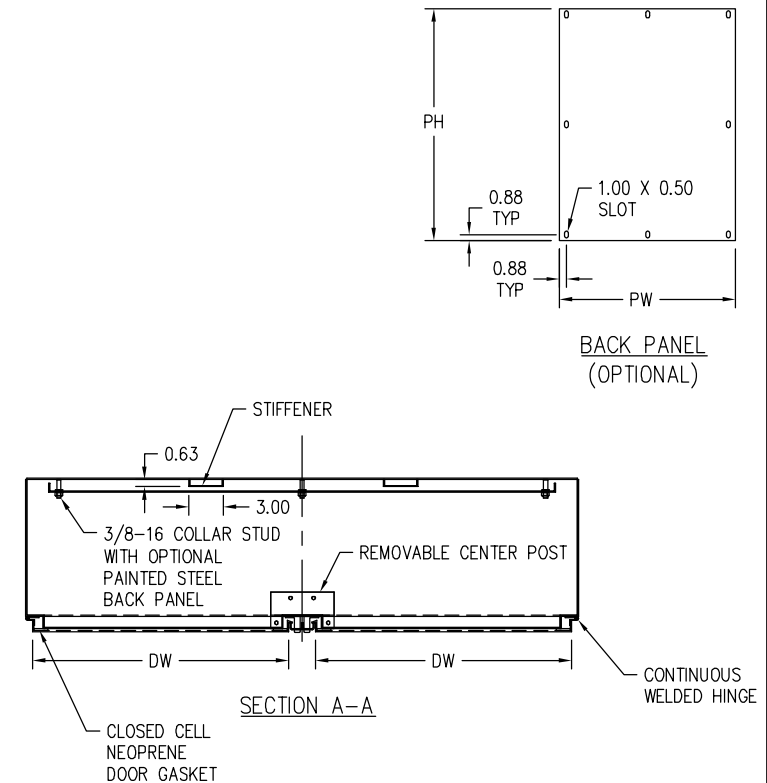


TYPE 4X STAINLESS STEEL FLOOR MOUNTED DOUBLE DOOR ENCLOSURES

CONSTRUCTION:

C & I ENCLOSURES TYPE 4X STAINLESS STEEL FLOOR MOUNTED DOUBLE DOOR ENCLOSURES ARE FABRICATED IN ACCORDANCE WITH U.L. SPECIFICATIONS FROM CODE GAUGE TYPE 304 STAINLESS STEEL. A ROLLED LIP IS PROVIDED AROUND THREE SIDES OF EACH DOOR AND ALONG THE TOP OF THE ENCLOSURE OPENING TO EXCLUDE LIQUIDS AND CONTAMINANTS. AN OIL RESISTANT GASKET IS ATTACHED TO THE DOORS. THE ENCLOSURES ARE PROVIDED WITH CONTINUOUS HINGES AND DOOR CLAMPS ON THREE SIDES OF EACH DOOR TO INSURE A WATERTIGHT SEAL. A HASP AND STAPLE ARE PROVIDED ON EACH DOOR FOR PADLOCKING. THERE IS A REMOVABLE CENTERPOST FOR COMPLETE ACCESS TO THE BACK PANEL. EACH ENCLOSURE IS PROVIDED WITH LIFTING EYES FOR EASY HANDLING. ALL SEAMS ARE CONTINUOUSLY WELDED AND GROUND SMOOTH. COLLAR STUDS ARE PROVIDED FOR MOUNTING OPTIONAL PANELS.

C & I ENCLOSURES TYPE 4X STAINLESS STEEL FLOOR MOUNTED DOUBLE DOOR ENCLOSURES ARE PROVIDED UNPAINTED AND HAVE A BRUSHED FINISH ON THE EXTERIOR.

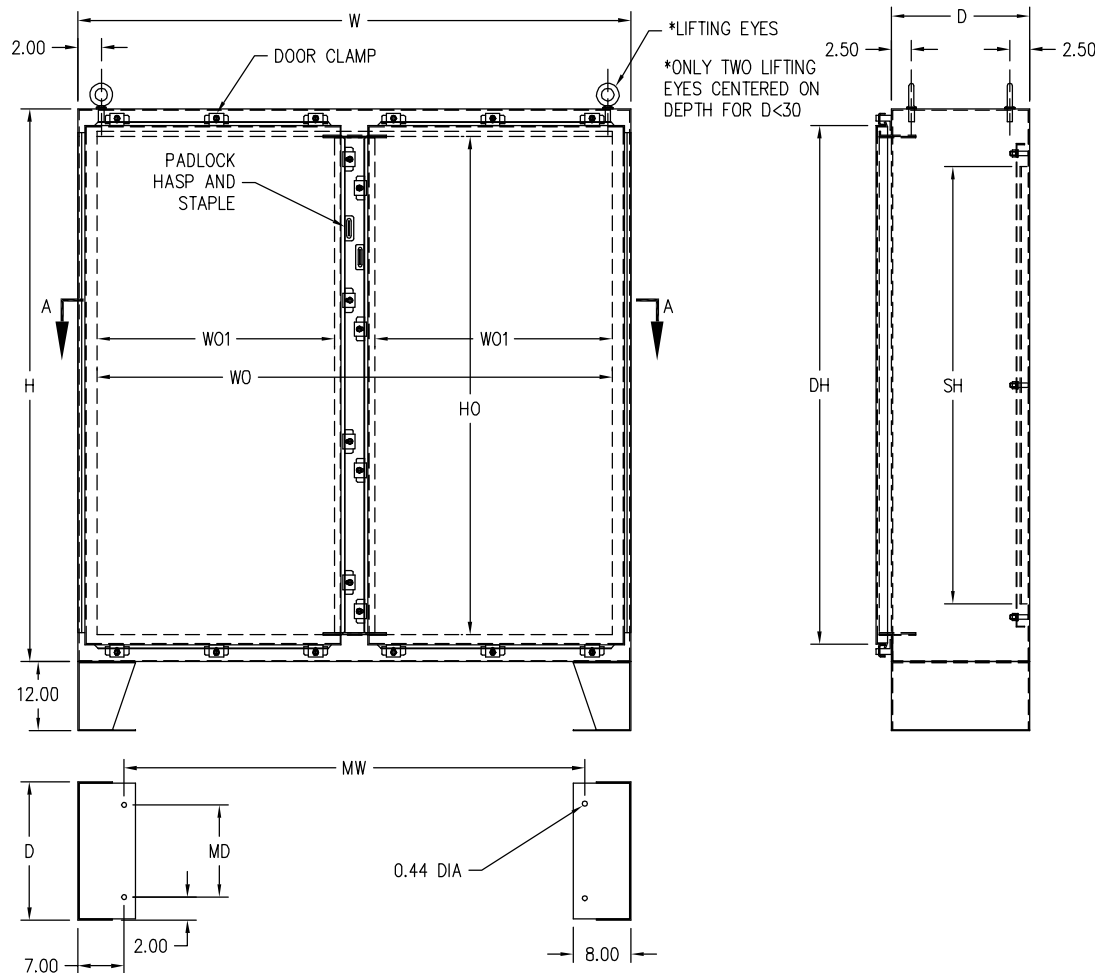

CUSTOMER APPROVAL
BY _____
DATE _____

DRAWING NOT TO SCALE
SOME FEATURES
EXAGGERATED FOR CLARITY



913 Industrial Park Cir.
Bessemer, AL 35022
PHONE: 205.424.4855
FAX: 205.424.4858
www.cienlosures.com



TYPE 4X STAINLESS STEEL FLOOR MOUNTED DOUBLE DOOR ENCLOSURES

Part No	Enclosure Dimensions							Door		Body Stiffener	Mat'l Gauge	Mounting		Door Clamp Count (Each Door)		Panel	
	Nominal			Opening w/ Centerpost Installed		Opening w/ Centerpost Removed											
	H	W	D	HO	WO1	HO	WO	DH	DW	SH		MD	MW	Vert	Horiz	PH	PW
I-624810SDT4X	62.00	48.00	10.00	57.24	20.63	57.24	44.76	59.08	22.00	52.00	12	6.00	34.00	5	3	56.00	44.00
I-626012SDT4X	62.00	60.00	12.00	57.24	26.63	57.24	56.76	59.08	28.00	52.00	12	8.00	46.00	5	3	56.00	56.00
I-746012SDT4X	74.00	60.00	12.00	69.24	26.63	69.24	56.76	71.08	28.00	64.00	12	8.00	46.00	6	3	68.00	56.00
I-747212SDT4X	74.00	72.00	12.00	69.24	32.63	69.24	68.76	71.08	34.00	64.00	12	8.00	58.00	6	3	68.00	68.00