


TYPE 3R RAINPROOF BOXES

CONSTRUCTION:

C & I ENCLOSURES TYPE 3R RAINPROOF BOXES ARE FABRICATED IN ACCORDANCE WITH U.L. SPECIFICATIONS FROM CODE GAUGE MATERIAL. A DRIPSHIELD ALONG THE TOP PROTECTS FROM FALLING RAIN, SNOW OR SLEET. A SLIDE ON COVER IS ATTACHED BY SCREWS ALONG THE BOTTOM EDGE OF THE BOX.

FINISH:

C & I ENCLOSURES TYPE 3R RAINPROOF BOXES ARE AVAILABLE IN G-90U GALVANIZED STEEL, OR AN ANSI 61 GRAY POLYESTER TEXTURED POWDERCOATING INSIDE AND OUT OVER PAINT GRIP GALVANIZED STEEL.

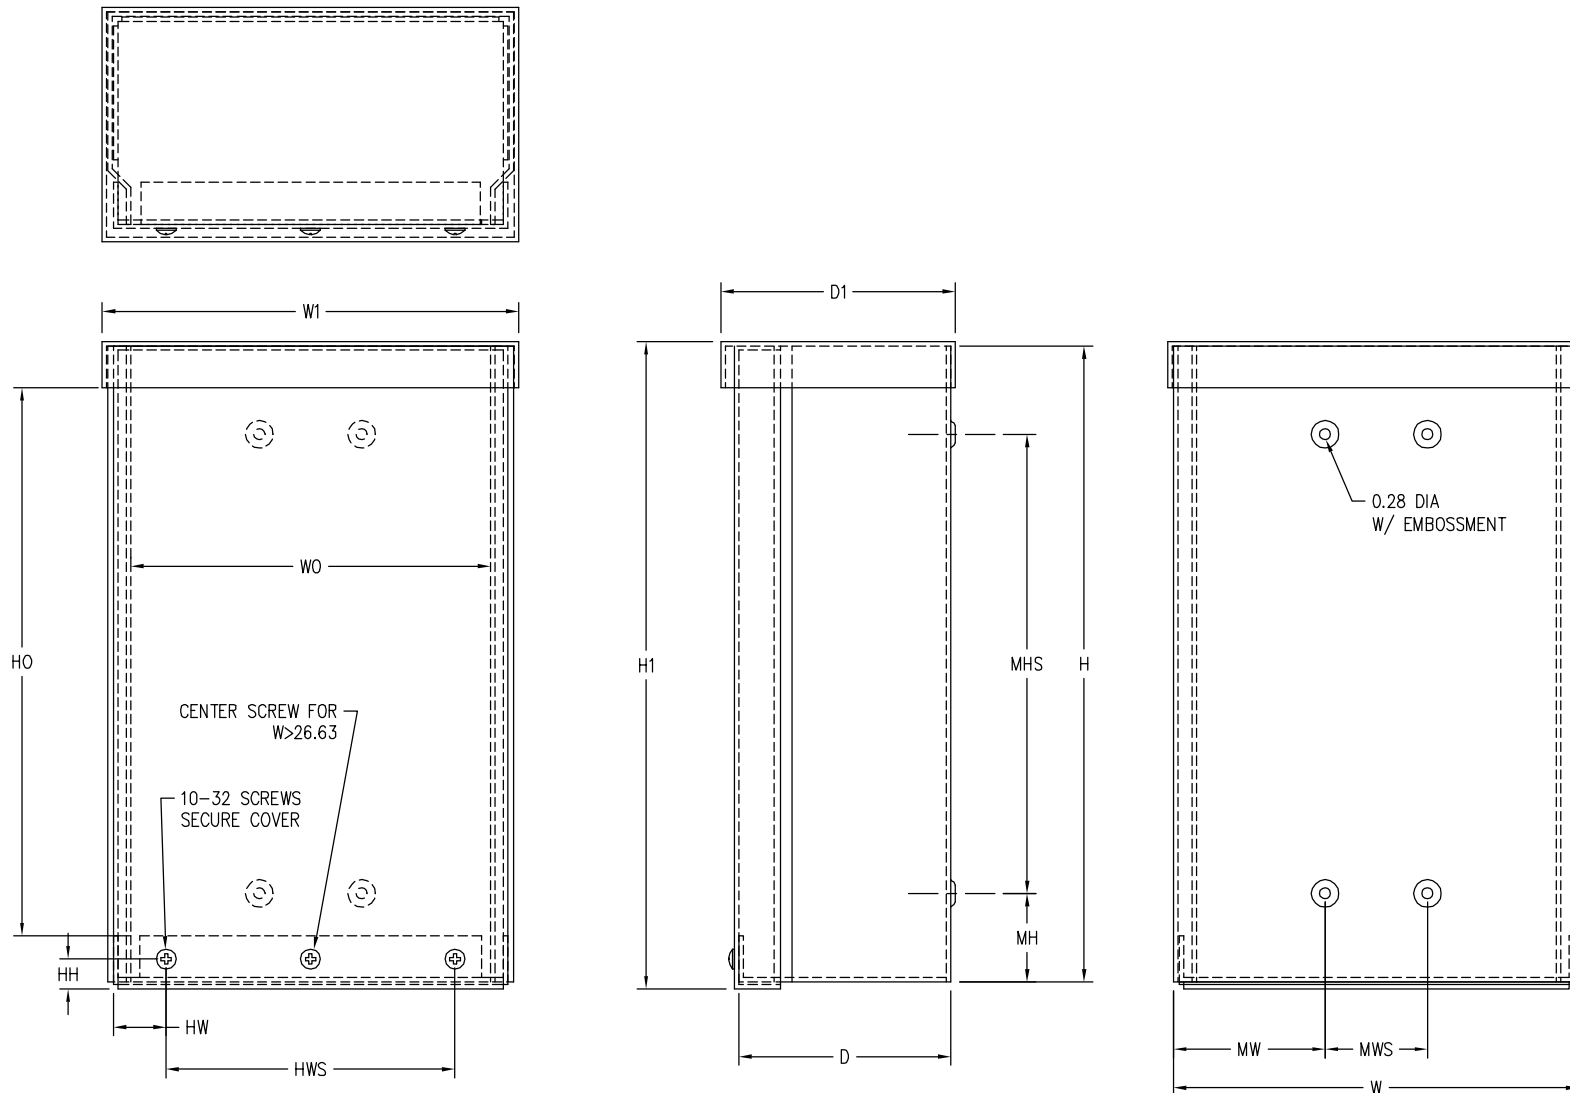

DRAWING NOT TO SCALE
SOME FEATURES
EXAGGERATED FOR CLARITY



913 Industrial Park Cir.
Bessemer, AL 35022
PHONE: 205.424.4855
FAX: 205.424.4858
www.cienlosures.com



TYPE 3R RAINPROOF BOXES

Part No	Box Dimensions								Mat'l Gauge	Mounting Holes				Cover		
				Opening		Overall				MH	MHS	MW	MWS	HH	HW	HWS
	H	W	D	HO	WO	H1	W1	D1								
C-664RB	6.00	6.00	4.00	4.81	5.38	6.16	6.15	4.30	16	1.20	3.60	1.88	2.25	0.42	1.25	3.38
C-864RB	8.00	6.00	4.00	6.81	5.38	8.16	6.15	4.30	16	1.20	5.60	1.88	2.25	0.42	1.25	3.38
C-884RB	8.00	8.00	4.00	6.81	7.38	8.16	8.15	4.30	16	1.20	5.60	2.88	2.25	0.42	1.25	5.38
C-1084RB	10.00	8.00	4.00	8.81	7.38	10.16	8.15	4.30	16	1.20	7.60	2.88	2.25	0.42	1.25	5.38
C-10104RB	10.00	10.00	4.00	8.81	9.38	10.16	10.15	4.30	16	1.20	7.60	3.88	2.25	0.42	1.25	7.38
C-1284RB	12.00	8.00	4.00	10.81	7.38	12.16	8.15	4.30	16	1.20	9.60	2.88	2.25	0.42	1.25	5.38
C-12124RB	12.00	12.00	4.00	10.81	11.38	12.16	12.15	4.30	16	1.20	9.60	4.88	2.25	0.42	1.25	9.38
C-666RB	6.00	6.00	6.00	4.81	5.38	6.16	6.15	6.30	16	1.20	3.60	1.88	2.25	0.42	1.25	3.38
C-886RB	8.00	8.00	6.00	6.81	7.38	8.16	8.15	6.30	16	1.20	5.60	2.88	2.25	0.42	1.25	5.38
C-1086RB	10.00	8.00	6.00	8.81	7.38	10.16	8.15	6.30	16	1.20	7.60	2.88	2.25	0.42	1.25	5.38
C-10106RB	10.00	10.00	6.00	8.81	9.38	10.16	10.15	6.30	16	1.20	7.60	3.88	2.25	0.42	1.25	7.38
C-12106RB	12.00	10.00	6.00	10.81	9.38	12.16	10.15	6.30	16	1.20	9.60	3.88	2.25	0.42	1.25	7.38
C-12126RB	12.00	12.00	6.00	10.81	11.38	12.16	12.15	6.30	16	1.20	9.60	4.88	2.25	0.42	1.25	9.38
C-15126RB	15.00	12.00	6.00	13.81	11.38	15.16	12.15	6.30	16	1.20	12.60	4.88	2.25	0.42	1.25	9.38
C-18126RB	18.00	12.00	6.00	16.81	11.38	18.16	12.15	6.30	16	1.20	15.60	4.88	2.25	0.42	1.25	9.38
C-18156RB	18.00	15.00	6.00	16.81	14.38	18.16	15.15	6.30	16	1.20	15.60	2.50	10.00	0.42	1.25	12.38
C-18186RB	18.00	18.00	6.00	16.81	17.38	18.16	18.15	6.30	16	1.20	15.60	2.50	13.00	0.42	1.25	15.38
C-24186RB	24.00	18.00	6.00	22.81	17.38	24.16	18.15	6.30	16	1.20	21.60	2.50	13.00	0.42	1.25	15.38
C-24246RB	24.00	24.00	6.00	22.83	23.35	24.19	24.18	6.35	14	1.20	21.60	5.50	13.00	0.42	1.25	21.38
C-12128RB	12.00	12.00	8.00	10.81	11.38	12.16	12.15	8.30	16	1.20	9.60	4.88	2.25	0.42	1.25	9.38
C-18158RB	18.00	15.00	8.00	16.81	14.38	18.16	15.15	8.30	16	1.20	15.60	2.50	10.00	0.42	1.25	12.38
C-18188RB	18.00	18.00	8.00	16.81	17.38	18.16	18.15	8.30	16	1.20	15.60	2.50	13.00	0.42	1.25	15.38
C-24188RB	24.00	18.00	8.00	22.81	17.38	24.16	18.15	8.30	16	1.20	21.60	2.50	13.00	0.42	1.25	15.38
C-24248RB	24.00	24.00	8.00	22.83	23.35	24.19	24.18	8.35	14	1.20	21.60	5.50	13.00	0.42	1.25	21.38
C-30248RB	30.00	24.00	8.00	28.83	23.35	30.19	24.18	8.35	14	1.20	27.60	5.50	13.00	0.42	1.25	21.38
C-242410RB	24.00	24.00	10.00	22.83	23.35	24.19	24.18	10.35	14	1.20	21.60	5.50	13.00	0.42	1.25	21.38
C-181812RB	18.00	18.00	12.00	16.81	17.38	18.16	18.15	12.30	16	1.20	15.60	2.50	13.00	0.42	1.25	15.38
C-241812RB	24.00	18.00	12.00	22.81	17.38	24.16	18.15	12.30	16	1.20	21.60	2.50	13.00	0.42	1.25	15.38
C-242412RB	24.00	24.00	12.00	22.83	23.35	24.19	24.18	12.35	14	1.20	21.60	5.50	13.00	0.42	1.25	21.38
C-362412RB	36.00	24.00	12.00	34.83	23.35	36.19	24.18	12.35	14	1.20	33.60	5.50	13.00	0.42	1.25	21.38
C-363012RB	36.00	30.00	12.00	34.83	29.35	36.19	30.18	12.35	14	1.20	33.60	1.50	27.00	0.42	1.25	27.38
C-363612RB	36.00	36.00	12.00	34.83	35.35	36.19	36.18	12.35	14	1.20	33.60	1.50	33.00	0.42	1.25	33.38