


TYPE 3R SMALL RAINPROOF HINGE COVER ENCLOSURES

CONSTRUCTION:

C & I ENCLOSURES TYPE 3R SMALL RAINPROOF HINGE COVER ENCLOSURES ARE FABRICATED IN ACCORDANCE WITH U.L. SPECIFICATIONS FROM CODE GAUGE MATERIAL. THE ENCLOSURES ARE PROVIDED WITH A CONTINUOUS HINGE AND A PADLOCKING TRUNK LATCH. A DRIPSHIELD ALONG THE TOP PROTECTS FROM FALLING RAIN, SNOW OR SLEET. EXTERNAL MOUNTING FEET ARE PROVIDED ALONG WITH STUDS FOR MOUNTING OPTIONAL PANELS.

FINISH:

ENCLOSURES ARE PROVIDED WITH AN ANSI 61 GRAY POLYESTER POWDERCOATING INSIDE AND OUT OVER PAINT GRIP GALVANIZED STEEL.

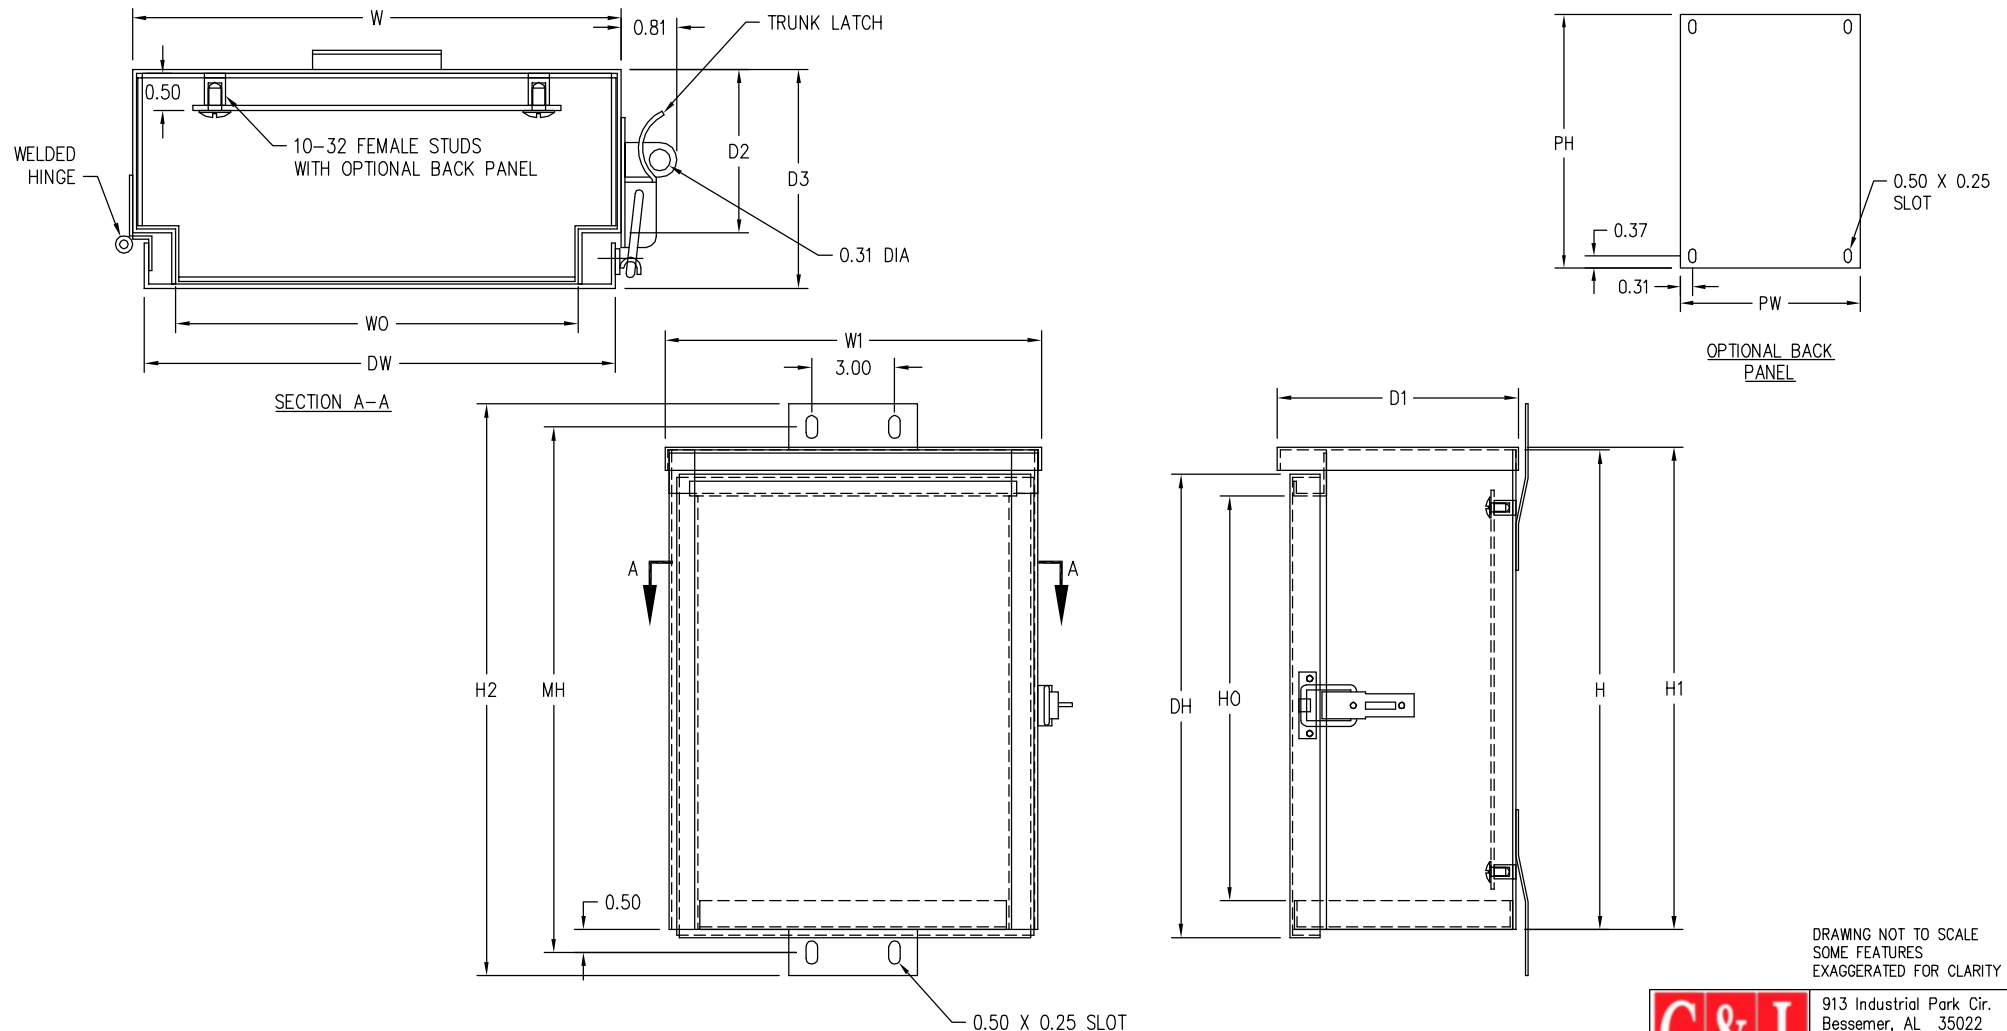

DRAWING NOT TO SCALE
SOME FEATURES
EXAGGERATED FOR CLARITY



913 Industrial Park Cir.
Bessemer, AL 35022
PHONE: 205.424.4855
FAX: 205.424.4858
www.cienlosures.com



TYPE 3R SMALL RAINPROOF HINGE COVER ENCLOSURES

Part No	Box Dimensions											Mat'l Gauge	Mounting	Door		Panel	
	Nominal			Other Dimensions						Opening							
	H	W	D	H1	H2	W1	D1	D2	D3	HO	WO		MH	DH	DW	PH	PW
C-1086RHS	10.00	8.00	6.00	10.06	12.00	8.17	6.43	5.30	6.10	8.38	6.75	16	11.00	9.65	7.75	8.25	6.25
C-10106RHS	10.00	10.00	6.00	10.06	12.00	10.17	6.43	5.30	6.10	8.38	8.75	16	11.00	9.65	9.75	8.25	8.25
C-12106RHS	12.00	10.00	6.00	12.06	14.00	10.17	6.43	5.30	6.10	10.38	8.75	16	13.00	11.65	9.75	10.25	8.25
C-12126RHS	12.00	12.00	6.00	12.06	14.00	12.17	6.43	5.30	6.10	10.38	10.75	16	13.00	11.65	11.75	10.25	10.25
C-14126RHS	14.00	12.00	6.00	14.06	16.00	12.17	6.43	5.30	6.10	12.38	10.75	16	15.00	13.65	11.75	12.25	10.25
C-10108RHS	10.00	10.00	8.00	10.06	12.00	10.17	8.43	7.30	8.10	8.38	8.75	16	11.00	9.65	9.75	8.25	8.25
C-12108RHS	12.00	10.00	8.00	12.06	14.00	10.17	8.43	7.30	8.10	10.38	8.75	16	13.00	11.65	9.75	10.25	8.25
C-12128RHS	12.00	12.00	8.00	12.06	14.00	12.17	8.43	7.30	8.10	10.38	10.75	16	13.00	11.65	11.75	10.25	10.25
C-14128RHS	14.00	12.00	8.00	14.06	16.00	12.17	8.43	7.30	8.10	12.38	10.75	16	15.00	13.65	11.75	12.25	10.25
C-101010RHS	10.00	10.00	10.00	10.06	12.00	10.17	10.43	9.30	10.10	8.38	8.75	16	11.00	9.65	9.75	8.25	8.25
C-121010RHS	12.00	10.00	10.00	12.06	14.00	10.17	10.43	9.30	10.10	10.38	8.75	16	13.00	11.65	9.75	10.25	8.25
C-121210RHS	12.00	12.00	10.00	12.06	14.00	12.17	10.43	9.30	10.10	10.38	10.75	16	13.00	11.65	11.75	10.25	10.25
C-141210RHS	14.00	12.00	10.00	14.06	16.00	12.17	10.43	9.30	10.10	12.38	10.75	16	15.00	13.65	11.75	12.25	10.25