


TYPE 12 PAINTED WALL MOUNTED DOUBLE DOOR ENCLOSURES

CONSTRUCTION:

C & I ENCLOSURES TYPE 12 PAINTED WALL MOUNTED DOUBLE DOOR ENCLOSURES ARE FABRICATED IN ACCORDANCE WITH U.L. SPECIFICATIONS FROM CODE GAUGE MATERIAL. AN OIL RESISTANT GASKET IS ATTACHED TO THE DOORS. THE ENCLOSURES HAVE OVERLAPPING DOORS WHICH ELIMINATE THE NEED FOR A CENTERPOST. A THREE POINT LATCH IS PROVIDED WHICH INCORPORATES ROLLER ARMS TO HOLD THE DOORS SECURELY CLOSED. THE ENCLOSURES ARE PROVIDED WITH CONTINUOUS HINGES. ALL SEAMS ARE CONTINUOUSLY WELDED AND GROUND SMOOTH. EXTERNAL MOUNTING FEET ARE PROVIDED ALONG WITH STUDS FOR MOUNTING OPTIONAL PANELS.

FINISH:

C & I ENCLOSURES TYPE 12 PAINTED WALL MOUNTED DOUBLE DOOR ENCLOSURES ARE PROVIDED WITH AN ANSI 61 GRAY POLYESTER POWDERCOATING INSIDE AND OUT OVER PAINT GRIP GALVANIZED STEEL.

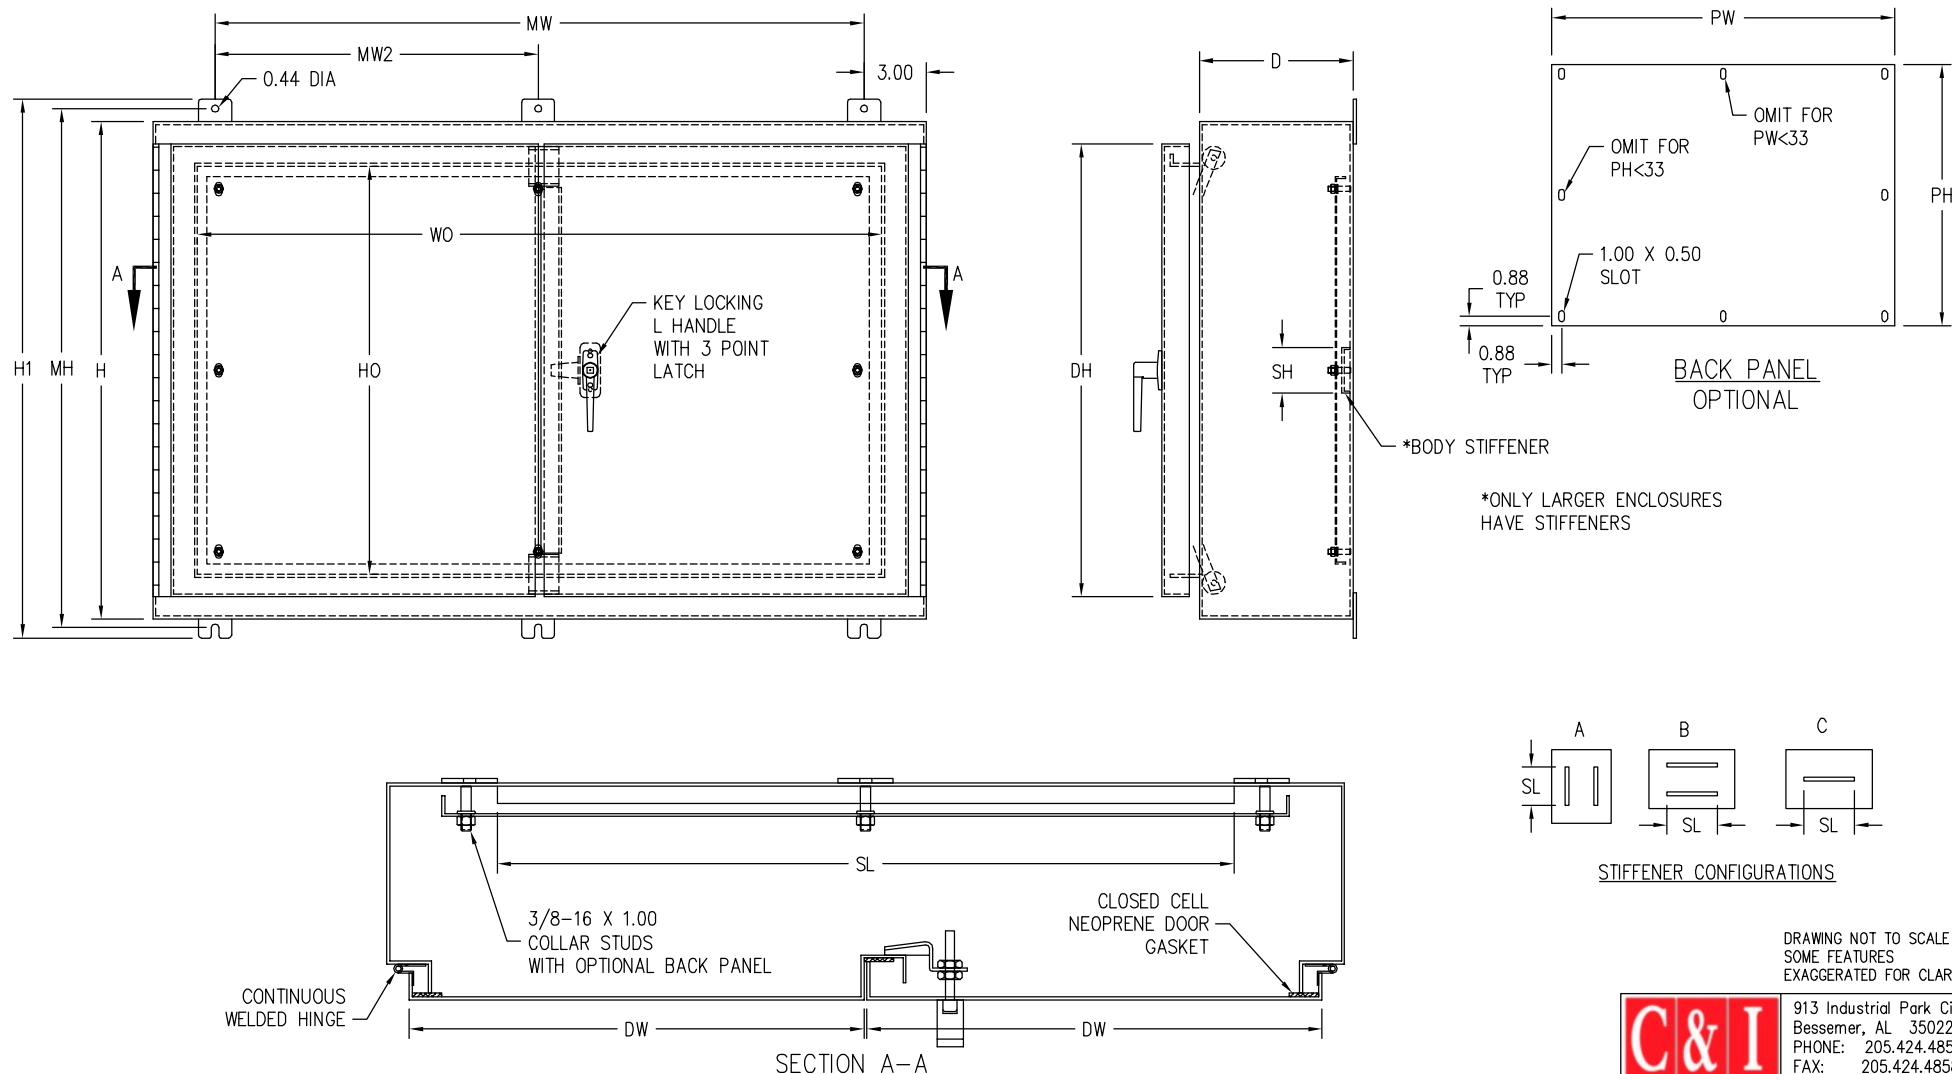

*ONLY LARGER ENCLOSURES HAVE STIFFENERS

DRAWING NOT TO SCALE
SOME FEATURES
EXAGGERATED FOR CLARITY



913 Industrial Park Cir.
Bessemer, AL 35022
PHONE: 205.424.4855
FAX: 205.424.4858
www.cienlosures.com



TYPE 12 PAINTED WALL MOUNTED DOUBLE DOOR ENCLOSURES

Part No	Enclosure Dimensions						Door		Stiffeners				Mat'l Gauge	Mounting			Panel	
	Nominal			Other Dims	Opening													
	H	W	D	H1	HO	WO	DH	DW	Body	SL	SH	CONFIG		MH	MW	MW1	PH	PW
I-24428WDT12	24.00	42.00	8.00	25.32	21.16	39.16	22.44	20.19	N	-----	-----	-----	14	25.32	36.00	18.00	21.00	39.00
I-24488WDT12	24.00	48.00	8.00	25.32	21.16	45.16	22.44	23.19	N	-----	-----	-----	14	25.32	42.00	21.00	21.00	45.00
I-304210WDT12	30.00	42.00	10.00	31.32	27.16	39.16	28.44	20.19	Y	34.00	3.00	C	14	31.32	36.00	18.00	27.00	39.00
I-304810WDT12	30.00	48.00	10.00	31.32	27.16	45.16	28.44	23.19	Y	40.00	3.00	C	14	31.32	42.00	21.00	27.00	45.00
I-306010WDT12	30.00	60.00	10.00	31.32	27.16	57.16	28.44	29.19	Y	52.00	3.00	C	14	31.32	54.00	27.00	27.00	57.00
I-364212WDT12	36.00	42.00	12.00	37.32	33.16	39.16	34.44	20.19	Y	34.00	3.00	C	14	37.32	36.00	18.00	33.00	39.00
I-364812WDT12	36.00	48.00	12.00	37.32	33.16	45.16	34.44	23.19	Y	40.00	3.00	C	14	37.32	42.00	21.00	33.00	45.00
I-366012WDT12	36.00	60.00	12.00	37.32	33.16	57.16	34.44	29.19	Y	52.00	3.00	C	14	37.32	54.00	27.00	33.00	57.00
I-426012WDT12	42.00	60.00	12.00	43.32	38.76	56.76	40.38	29.13	Y	52.00	3.00	B	12	43.32	54.00	27.00	38.00	56.00
I-484812WDT12	48.00	48.00	12.00	49.32	44.76	44.76	46.38	23.13	Y	40.00	3.00	A	12	49.32	42.00	21.00	44.00	44.00