



TYPE 3R PAINTED RAINPROOF HINGE COVER ENCLOSURES

CONSTRUCTION:

C & I ENCLOSURES TYPE 3R RAINPROOF HINGE COVER ENCLOSURES ARE FABRICATED IN ACCORDANCE WITH U.L. SPECIFICATIONS FROM CODE GAUGE MATERIAL. THE ENCLOSURES ARE PROVIDED WITH A CONTINUOUS HINGE AND A DOOR LATCH MECHANISM. A DRIPSHIELD ALONG THE TOP PROTECTS FROM FALLING RAIN, SNOW OR SLEET. EXTERNAL MOUNTING FEET ARE PROVIDED ALONG WITH STUDS FOR MOUNTING OPTIONAL PANELS.

FINISH:

C & I ENCLOSURES TYPE 3R RAINPROOF HINGE COVER ENCLOSURES ARE PROVIDED WITH AN ANSI 61 GRAY POLYESTER POWDERCOATING INSIDE AND OUT OVER PAINT GRIP GALVANIZED STEEL.

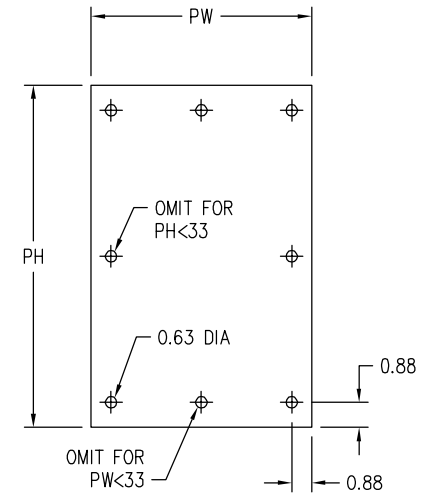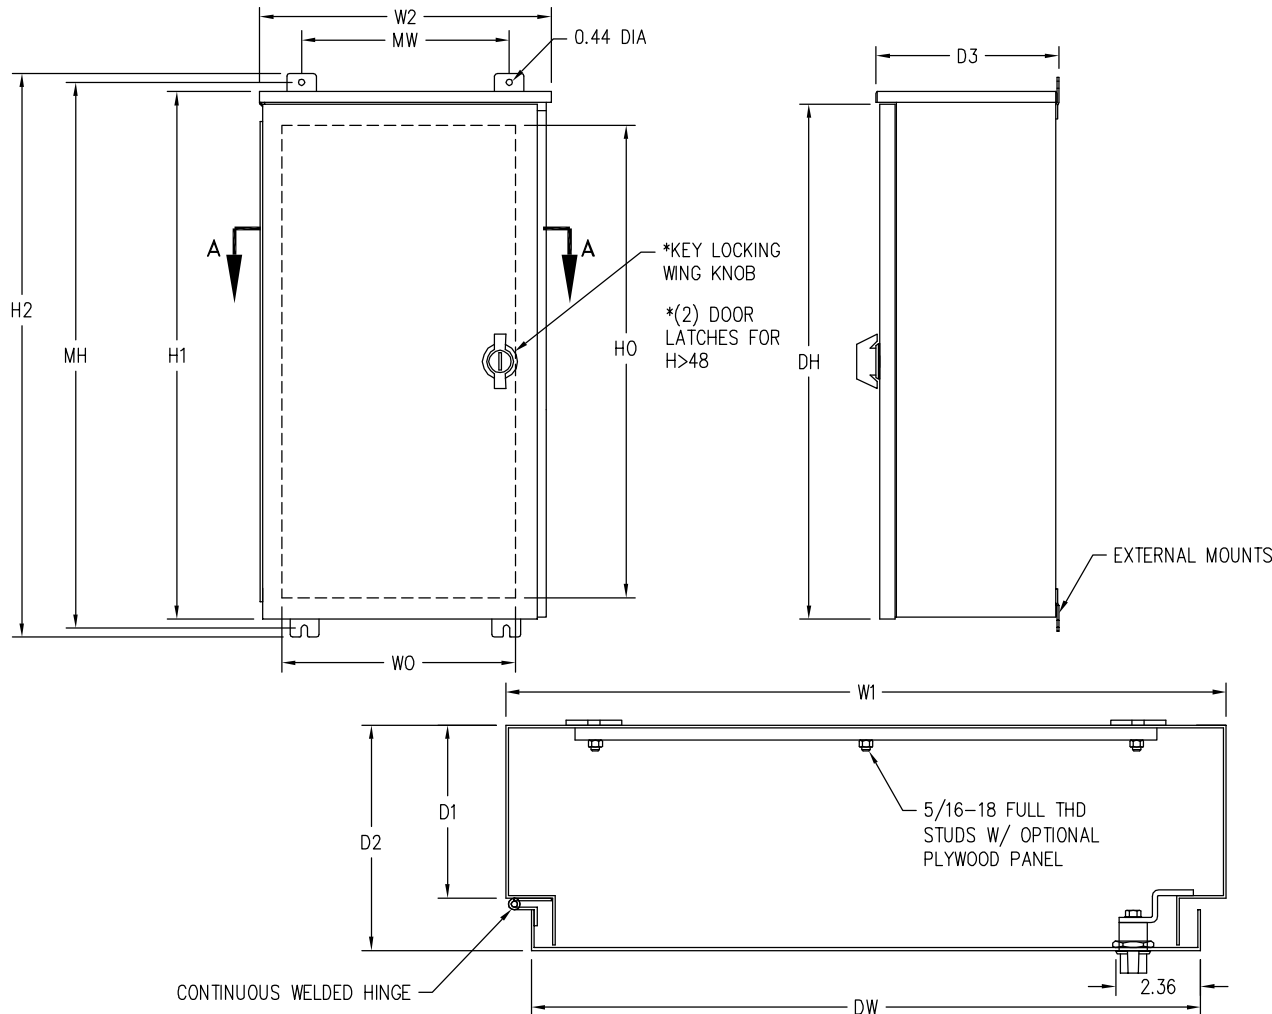

BACK PANEL DIMENSIONS

CUSTOMER APPROVAL

BY _____
DATE _____

DRAWING NOT TO SCALE
SOME FEATURES
EXAGGERATED FOR CLARITY



913 Industrial Park Cir.
Bessemer, AL 35022
PHONE: 205.424.4855
FAX: 205.424.4858
www.cienlosures.com

VIEW A-A



TYPE 3R RAINPROOF HINGE COVER ENCLOSURES

Part No	Enclosure Dimensions												Mat'l Gauge	Mounting		Door		Panel	
	Nominal			Other Dimensions							Opening								
	H	W	D	H1	H2	W1	W2	D1	D2	D3	HO	WO		MH	MW	DH	DW	PH	PW
C-16126RH	16.00	12.00	6.00	16.27	18.58	12.05	12.28	5.10	6.52	6.98	13.78	9.35	14	17.45	6.05	15.40	10.65	13.00	9.00
C-16166RH	16.00	16.00	6.00	16.27	18.58	16.05	16.28	5.10	6.52	6.98	13.78	13.35	14	17.45	10.05	15.40	14.65	13.00	13.00
C-20166RH	20.00	16.00	6.00	20.27	22.58	16.05	16.28	5.10	6.52	6.98	17.78	13.35	14	21.45	10.05	19.40	14.65	17.00	13.00
C-24246RH	24.00	24.00	6.00	24.27	26.58	24.05	24.28	5.10	6.52	6.98	21.78	21.35	14	25.45	18.05	23.40	22.65	21.00	21.00
C-36366RH	36.00	36.00	6.00	36.27	38.58	36.05	36.28	5.10	6.52	6.98	33.78	33.35	14	37.45	30.05	35.40	34.65	33.00	33.00
C-20208RH	20.00	20.00	8.00	20.27	22.58	20.05	20.28	7.10	8.52	8.98	17.78	17.35	14	21.45	14.05	19.40	18.65	17.00	17.00
C-24208RH	24.00	20.00	8.00	24.27	26.58	20.05	20.28	7.10	8.52	8.98	21.78	17.35	14	25.45	14.05	23.40	18.65	21.00	17.00
C-24248RH	24.00	24.00	8.00	24.27	26.58	24.05	24.28	7.10	8.52	8.98	21.78	21.35	14	25.45	18.05	23.40	22.65	21.00	21.00
C-30248RH	30.00	24.00	8.00	30.27	32.58	24.05	24.28	7.10	8.52	8.98	27.78	21.35	14	31.45	18.05	29.40	22.65	27.00	21.00
C-36248RH	36.00	24.00	8.00	36.27	38.58	24.05	24.28	7.10	8.52	8.98	33.78	21.35	14	37.45	18.05	35.40	22.65	33.00	21.00
C-36308RH	36.00	30.00	8.00	36.27	38.58	30.05	30.28	7.10	8.52	8.98	33.78	27.35	14	37.45	24.05	35.40	28.65	33.00	27.00
C-36368RH	36.00	36.00	8.00	36.27	38.58	36.05	36.28	7.10	8.52	8.98	33.78	33.35	14	37.45	30.05	35.40	34.65	33.00	33.00
C-48368RH	48.00	36.00	8.00	48.27	50.58	36.05	36.28	7.10	8.52	8.98	45.78	33.35	14	49.45	30.05	47.40	34.65	45.00	33.00
C-242410RH	24.00	24.00	10.00	24.27	26.58	24.05	24.28	9.10	10.52	10.98	21.78	21.35	14	25.45	18.05	23.40	22.65	21.00	21.00
C-362410RH	36.00	24.00	10.00	36.27	38.58	24.05	24.28	9.10	10.52	10.98	33.78	21.35	14	37.45	18.05	35.40	22.65	33.00	21.00
C-363610RH	36.00	36.00	10.00	36.27	38.58	36.05	36.28	9.10	10.52	10.98	33.78	33.35	14	37.45	30.05	35.40	34.65	33.00	33.00
C-303012RH	30.00	30.00	12.00	30.27	32.58	30.05	30.28	11.10	12.52	12.98	27.78	27.35	14	31.45	24.05	29.40	28.65	27.00	27.00
C-362412RH	36.00	24.00	12.00	36.27	38.58	24.05	24.28	11.10	12.52	12.98	33.78	21.35	14	37.45	18.05	35.40	22.65	33.00	21.00
C-363012RH	36.00	30.00	12.00	36.27	38.58	30.05	30.28	11.10	12.52	12.98	33.78	27.35	14	37.45	24.05	35.40	28.65	33.00	27.00
C-363612RH	36.00	36.00	12.00	36.27	38.58	36.05	36.28	11.10	12.52	12.98	33.78	33.35	14	37.45	30.05	35.40	34.65	33.00	33.00
C-483612RH	48.00	36.00	12.00	48.27	50.58	36.05	36.28	11.10	12.52	12.98	45.78	33.35	14	49.45	30.05	47.40	34.65	45.00	33.00
C-603612RH	60.00	36.00	12.00	60.27	62.58	36.05	36.28	11.10	12.52	12.98	57.78	33.35	14	61.45	30.05	59.40	34.65	57.00	33.00